


MFK2-L

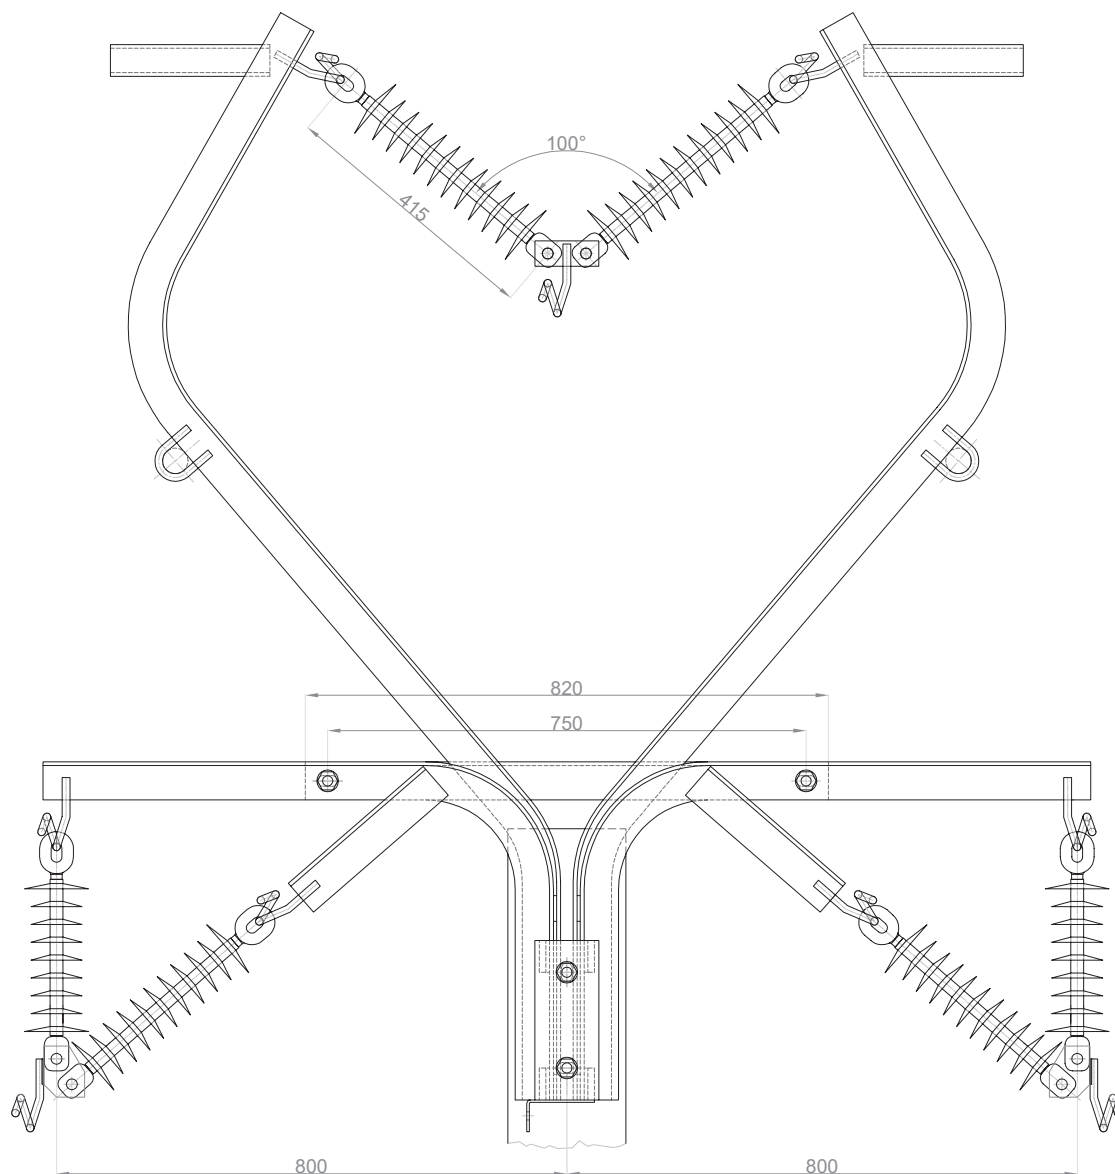

MFK2-... MV cross-arm application table

	Normal load		
	Single line	Angled	Tap
Type	MFK2-E	MFK2-ST	MFK-L
Cross-section	95 mm ²	95 mm ²	95 mm ²
Conductor type	AASC	AASC	AASC
Tensile strength	100 N/mm ²	100 N/mm ²	100 N/mm ²
Pole distance	150 m	150 m	150 m
Angle	180 +- 2°	165°	180 +- 2°