


## MFK2-ST

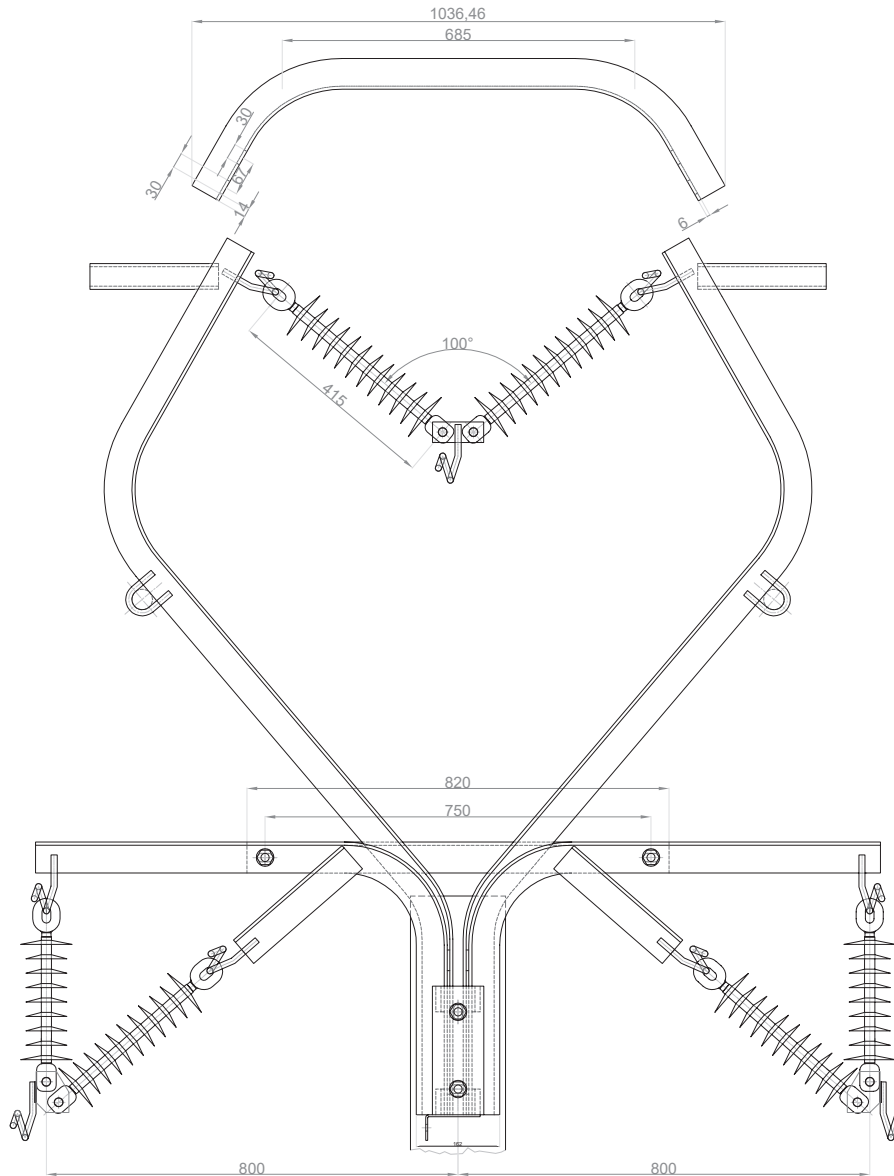

**MFK2-... MV cross-arm application table**

	Normal load		
	Single line	Angled	Tap
Type	<b>MFK2-E</b>	<b>MFK2-ST</b>	<b>MFK-L</b>
Cross-section	95 mm <sup>2</sup>	95 mm <sup>2</sup>	95 mm <sup>2</sup>
Conductor type	AASC	AASC	AASC
Tensile strength	100 N/mm <sup>2</sup>	100 N/mm <sup>2</sup>	100 N/mm <sup>2</sup>
Pole distance	150 m	150 m	150 m
Angle	180 +- 2°	165°	180 +- 2°