


MST

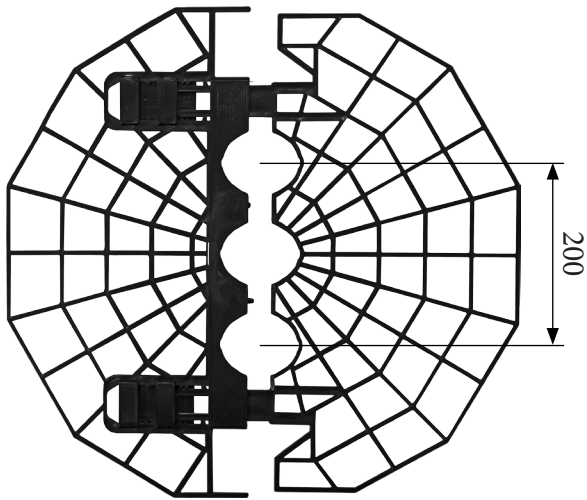

Main features

1. Compatible with all standard suspension and tensioning insulator-chain, as well as with single and double insulator-chain
2. Simple installation, no tools are required
3. UV-resistant plastic material
4. Massive, wind-proof design
5. Minimum 35 years long lifetime if used in the -25 ... +40 °C temperature range

Technical specifications

Effective range (in cable diameter):

1-2 x 20-70 mm²

Installation instructions

1. Position of installation: above the last shed (disc) or in between the last two sheds of the suspension or tensioning insulator (at the phase side).
2. In case of single insulator the two side holes should be used with the middle double insulator-chain.
3. The two fixing pins should be inserted to the appropriate groove.
4. Press it against the insulator body as far as it goes.